



■ Features

- 16 10/100/1000BaseT Ports
- 4 100/1000/2500BaseX SFP ports
- L2 management and security features
- L3 Routing features
- Operating wide temperature -40°C ~ 75°C
- Din Rail mounting (Rack Mounting kits optional)

■ Description

Features and Benefits

- Support standard ring network redundancy
- Support Media Redundancy Protocol (compliant with IEC62439)
- Any two ports can establish a self-recovery ring and support multiple independent self-recovery rings
- Support Dying gasp function and initiatively report power-down state through SNMP protocol
- Support MODBUS/UDP/SNMP remote monitoring and various mainstream OPC software
- Built-in unified real-time operating systems
- Dual redundant power inputs design
- Fanless, -40°C ~ 75°C wide operating temperature
- MTBF >600, 000 hours

■ Specifications

Technical Specifications-I

- IEEE 802.3 CSMA/CD method and physical Layer specifications
- IEEE 802.1p Priority Queuing
- IEEE 802.1q VLAN tagging
- IEEE 802.1d Spanning Tree Algorithm
- IEEE 802.1w Rapid Spanning Tree
- IEEE 802.1s Multiple Spanning Tree
- IEEE 802.3ac VLAN Tagging
- IEEE 802.1x Authentication
- IEEE 802.3ad Link Aggregation
- IEEE 802.3x Flow Control
- IEEE 802.3 Ethernet
- IEEE 802.3u Fast Ethernet
- IEEE 802.3z Gigabit Ethernet
- RFC 768 UDP
- RFC 791 IP
- RFC 792 ICMP
- RFC 793 TCP
- RFC 826 ARP
- RFC 854 Telnet Client & Server
- RFC 862 Echo Protocol
- RFC 863 Discard Protocol
- RFC 904 Exterior Gateway Protocol Formal Specification
- RFC 1027 Using ARP to Implement Transparent Subnet Gateways
- RFC 1058 RIP
- RFC 1059 1119 NTPv1/2
- RFC 1112 IGMP
- RFC 1191 Path MTU Discovery
- RFC 1256 ICMP Router discovery protocol ICMP
- RFC 1267 A Boarder Gateway Protocol 3 (BGP- 3)

Technical Specifications-II

- RFC 1388 RIP Version 2 Carrying Additional Information
- RFC 1403 BGP OSPF Interaction
- RFC 1519 CIDR (Classless Inter-domain Routing)
- RFC 1587 OSPF NSSA
- RFC 1812 Requirements for IP Version 4 Routers
- RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)
- RFC 2068 HTTP
- RFC 213 DHCP Server
- RFC 2138 RADIUS
- RFC 2139 RADIUS Accounting
- RFC 2236 IGMPv2
- RFC 2328 OSPF V2
- RFC 2338 VRRP
- RFC 2370 The OSPF Opaque LSA Option
- RFC 2474 DiffServ Precedence
- RFC 2475 DiffServ Core and Edge Router Functions
- RFC 2597 DiffServ Assured Forwarding
- RFC 2598 DiffServ Expedited Forwarding
- RFC 2644 Directed Broadcasts
- RFC 2865 Remote Authentication Dial User Service (RADIUS)
- RFC 3046 DHCP Relay Agent Information Option
- RFC 3222 Forwarding Information Base (FIB)
- GMRP GARP
- GVRP GARP
- SSH2 Secure Shell 2
- IGMP snooping
- SNMPv3

Specifications

Hardware Description

Backplane Bandwidth	68Gbps
CPU	333MHz RISC
Switch Architecture	Store-and-Forward
MAC Table Size	16K
Packet Buffer Size	4Mbit
Exchange Rate	148,800 pps/100M ports; 1,488,000 pps/1000M ports

Software Functions

Management Mode	Web, serial port, STD-17 MIB-II, STD-58 SMiv2, STD-59 RMON, STD-62 SNMPv3, SNMPv2c, SNMPv1, RFC2925 Ping MIB, Private MIBs
Diagnosis Mode	Indicator light, journal file, relay, RMON, port mirroring, TRAP
Redundancy	MRP, RSTP, Port Trunking
Time Synchronization	SNTP
Others	4K VLANs, IPv4/IPv6 multi-cast, storm control, MC/BC protection, Jumbo Frame

Mechanical Characteristics

Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Circuit Board	Approved by IPC

Environment

MTBF	> 600,000 hours
Storage Temperature	-40°C ~ 85°C
Operating Temperature	-40°C ~ 75°C
Ambient Relative Humidity	5% ~ 95% (non-condensing)

Electromagnetic Characteristics

EMI	FCC 47 CFR Part 15 Class A EN55022 Class A
EMS	IEC (EN)61000-4-2, Class 4 IEC (EN)61000-4-4, Class 3 IEC (EN)61000-4-5, Class 4 IEC (EN)61000-4-8, Class 5 IEC (EN)61000-4-11, Class 4 IEC (EN)61000-4-12, Class 3



Certification Information (In Process)

Product Safety	CE IEC/EN60950-1 FCC Part 15 Subpart B Class A IEC/EN55022 Class A
Industrial Control Industry	UL/cUL61010


Physical Performance

Dimensions_{(W x H x D) (mm)}	130 x 140 x 110
Protection Grade	IP40
Weight	1.3KG (Max)
Power Consumption	20.5W (Max)

Mechanical Drawings (Unit = mm)



Mechanical Drawings (Unit = mm)

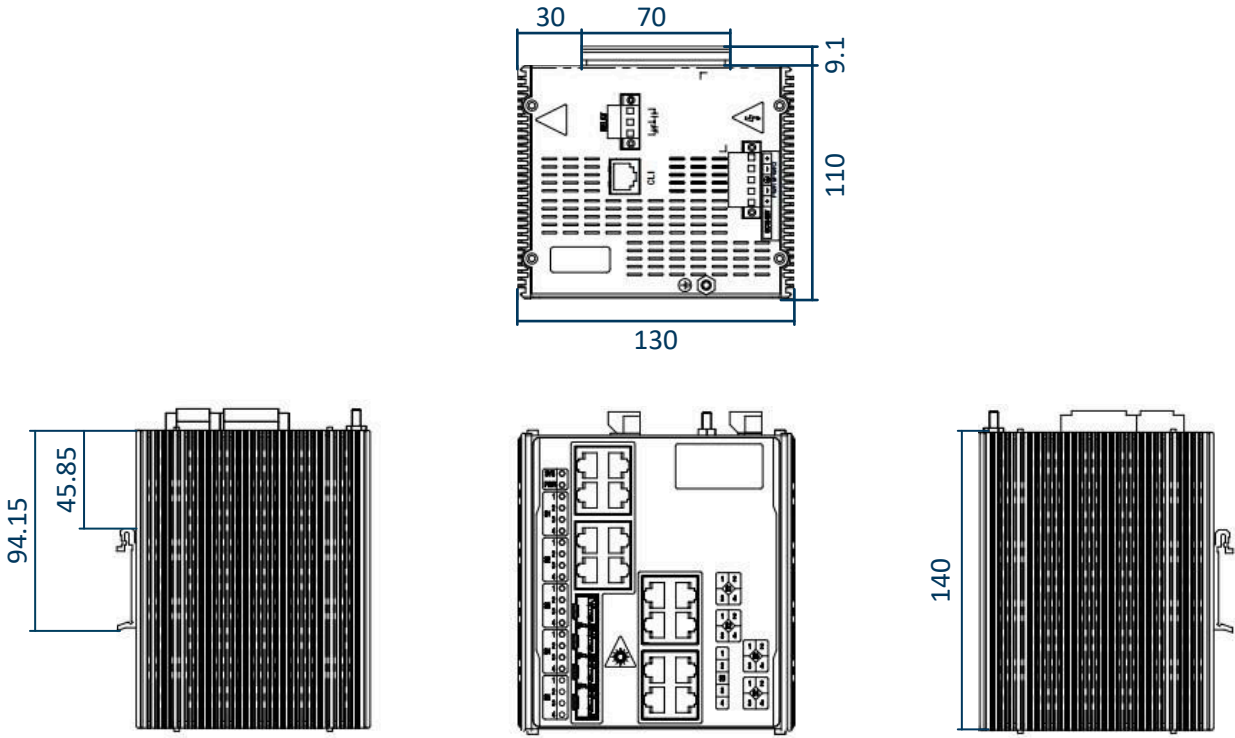

Ordering Codes

Model Number	Description
XTR-D3020G-4F-T-X6M	Layer2 and Layer 3, 4 100/1000/2500 Base X SFP Ports (SFP module not included) and 1610/100/1000BaseT Ports. Isolated Dual 18-60VDC Power Inputs.

XTR-D3020G-4F-T-X6M-15-04-2024