


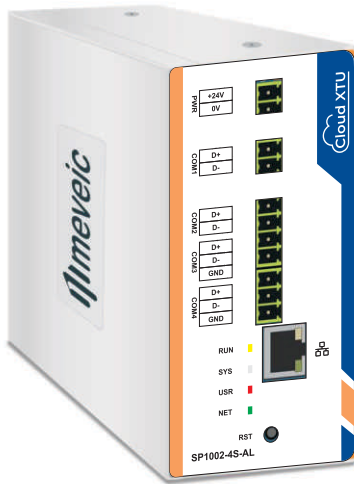

Smart RTU & Intelligent IoT Controller / Gateway

■ Features

- High speed 1GHz
- latest generation 800 MHz 32Bit ARM CPU
- 1 x 10/100 Ethernet port
- Data loss prevention and fail safe operation

■ Specifications

System

Processor	800MHz 32 Bit ARM Processor
------------------	-----------------------------

Power

Power Input	Input Supply : 24VDC +/- 10%
UPS Function	Data loss prevention and fail safe operation

Environment

Storage Temp.	- 20 to 80 °C
Humidity	10% to 90% (Non condensing)

I/O




Ethernet	1 x 10/100Mbps Ethernet
Serial port	4 Serial port, varies as per model
Reset Switch	To ON / OFF processor

Physical


Mounting	DIN Rail / Wall mount IP30
Dimensions (W x H x D) (mm)	60 x 120 x 119.80
Enclosure	Aluminium Enclosure

Product I/O View

SP-1002-4S-1144-D0008-B-WM

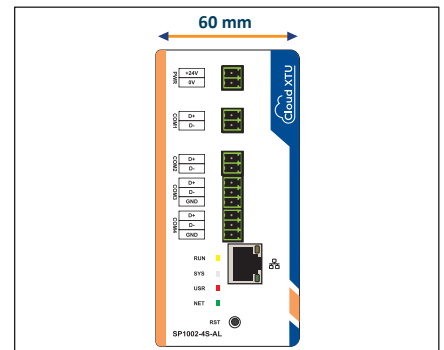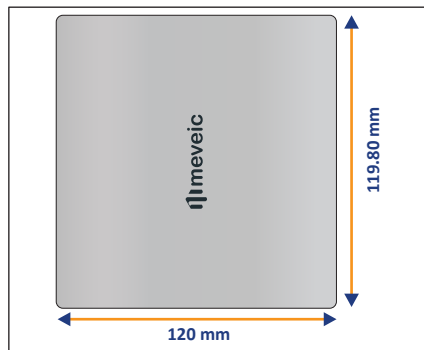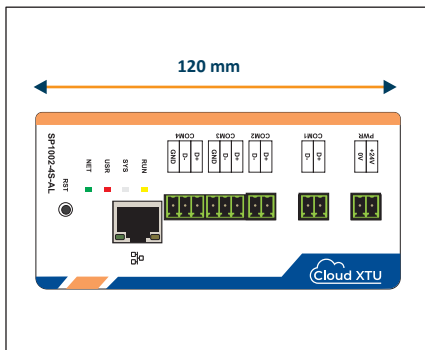

Mechanical Drawings (Unit = mm)

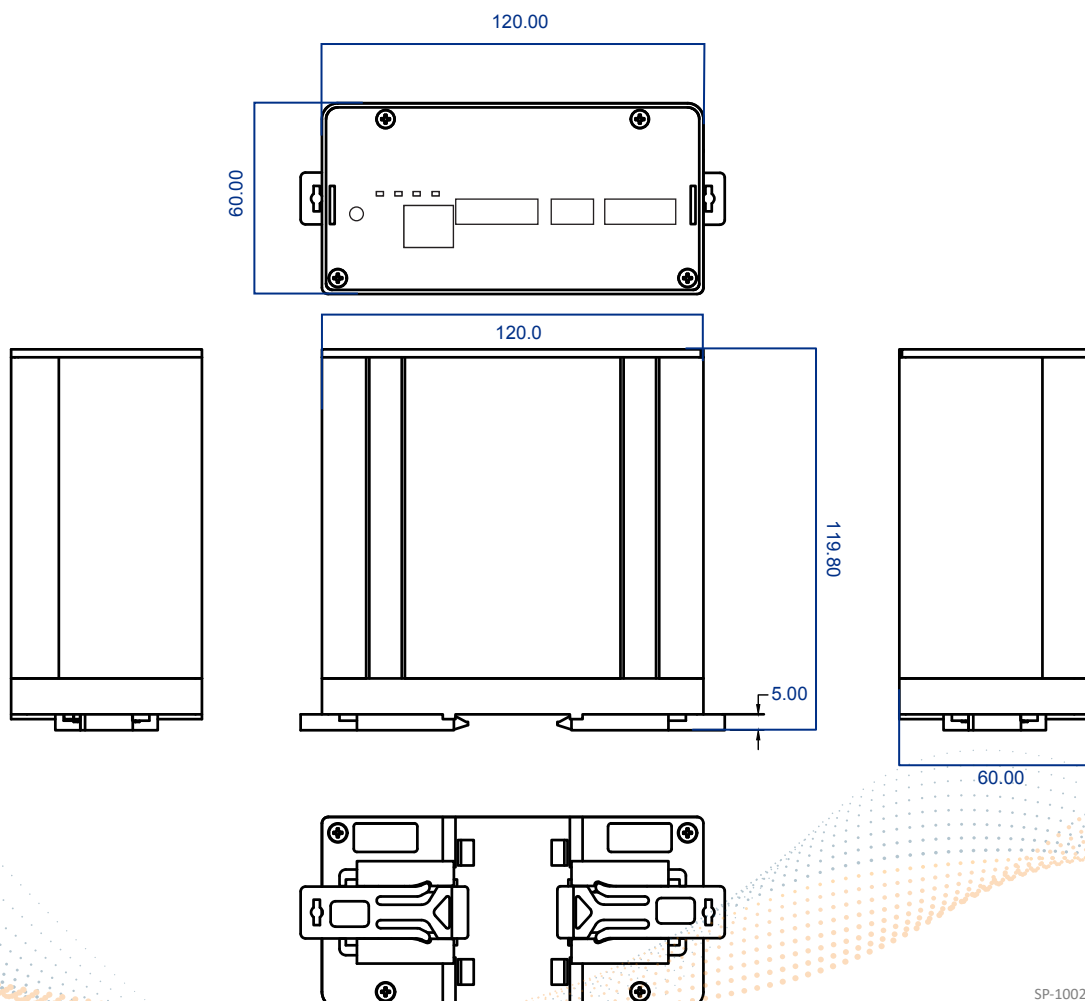

SP-1002-4S-1144-D0008-B-WM-16-07-2026